


**PLANTING NOTES:**

1. The Landscape Contractor shall protect all utilities prior to starting construction.
2. The Contractor shall supply all plant materials in quantities sufficient to complete all planting shown on this drawing.
3. All plant materials to conform to guidelines established by the American Standard for Nursery Stock published by the American Assn. of Nurserymen.
4. All plant materials shall be selected by the Landscape Architect with the exception of those materials selected by the Landscape Architect with the approval of the Landscape Architect.
5. All plants to be located on the site for approval of the Landscape Architect prior to installation.
6. If the plant list does not agree with the planting plan, the plan shall be followed.
7. The Contractor shall guarantee all plant materials for one year following installation.
8. All plant beds to receive 3" shredded bark mulch; supply sample for approval of Landscape Architect.
9. All planting beds to have a minimum 12" depth of topsoil; all lawns to be sod. Remove old lawn, weeds, mulch, rootball. Add topsoil so that all lawns to have a minimum 6" depth of topsoil. See Specs for requirements.
10. No substitution of plant materials shall be allowed without approval of Landscape Architect.

**LEGEND:**

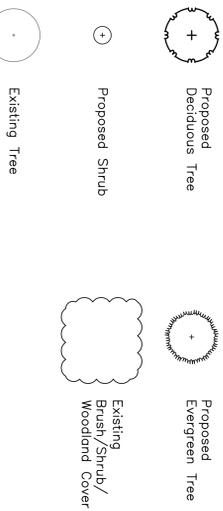

**PLANT LIST:**

TREES	SYMBOL BOTANICAL NAME	COMMON NAME	SIZE
AR	Acer rubrum	Red Maple	3'-3.5' col.
AL	Amelanchier laevis	Allegheny Shadbush	2.5-3 col.
CC	Cercis canadensis	Eastern Redbud	2-2.5' ht.
CK	Cladastis kentukea	Yellowwood	2-2.5' ht.
NS	Nyssa sylvatica	Black Gum	2.5-3' col.
PS	Pinus strobus	Eastern White Pine	8-10' ht.
SHRUBS	SYMBOL BOTANICAL NAME	COMMON NAME	SIZE
CA	Celastrus orbicollis	Summersweet	3'-3.5'
CS	Cornus stolonifera 'Bailey'	Bailey Dogwood	3-3.5'
FG	Fothergilla gardenii	Large Fothergilla	2-2.5'
FM	Fothergilla major	Large Fothergilla	3-3.5'
HV	Hammamelis virginiana	Common Witchhazel	3-3.5'
HQ	Hydrangea quercifolia	Oakleaf Hydrangea	7 gdl.
IG	Ilex glabra	Inkberry	3-3.5'
IV	Itea virginica	Sweetspire	2-2.5'
KL	Kalmia latifolia	Mountain Laurel	2.5-3'
MP	Myrica pensylvanica	Bogberry	3-3.5'
PF	Potentilla fruticosa 'Primrose Beauty'	Primrose Beauty Potentilla	5 gdl.
RA	Rhododendron arborescens cultivars	Smooth Rhododendron	3-3.5'
VA	Vaccinium angustifolium	Lowbush Blueberry	1.5-2'
VD	Viburnum dentatum 'Blue Wulfen'	Blue Wulfen Viburnum	3-3.5'
VT	Viburnum trilobum	American Cranberrybush	3-3.5'
PERENNIALS	SYMBOL BOTANICAL NAME	COMMON NAME	SIZE
AN	Aster novae-angliae	New England Aster	1 gdl.
AT	Astilbe tuberosa	Butterfly Milkweed	1 gdl.
CV	Coreopsis verticillata 'Creme Brulee'	Creme Brulee Tickseed	1 gdl.
DE	Dicentra eximia	Fringed Bleeding Heart	1 gdl.
EG	Euphorbia x grandiflorum 'Lilifee'	Lilifee Bishop's Cap	1 gdl.
ER	Eupatorium rugosum	Joe-Pye-Weed	1 gdl.
PH	Phlox stolonifera	Creeping Phlox	1 gdl.
RF	Rudbeckia fulgida var. fulgida	Black Eyed Susan	1 gdl.
SA	Sedum x Autumn Joy'	Autumn Joy Sedum	1 gdl.
TC	Taxella cordifolia	Foam Flower	1 gdl.
SS	Schizanthus scoparium	Sweet Kate Spideum	1 gdl.
LT	Liatris scariosa	Lilie Bluestem	1 gdl.



ORIGINAL SUBMISSION PLAN: SEE AMENDED PLAN FOR REVISION TO THIS AREA

ORIGINAL SUBMISSION PLAN: SEE AMENDED PLAN FOR REVISION TO THIS AREA

REVISION NO.	DATE	REVISIONS

Carlisle Public School  
 Carlisle, MA  
**PLANTING PLAN**  
 SCALE: 1" = 20'-0" DRAWN BY: KRF CHECKED BY: CCB

**SITE PLAN REVIEW**  
 09-09-2010

**CB A Landscape Architects LLC**  
 212 ELM STREET | SOMERVILLE MA 02144 | www.cbainc.com  
 617.875.7000 | 617.875.7070 | 617.875.7070

**HMFH Architects, Inc.**  
 130 Bishop Allen Drive  
 Cambridge, MA 02139  
 617.492.2200  
 617.875.8775  
 www.HMFH.com  
 Architecture • Programming • Master Planning